
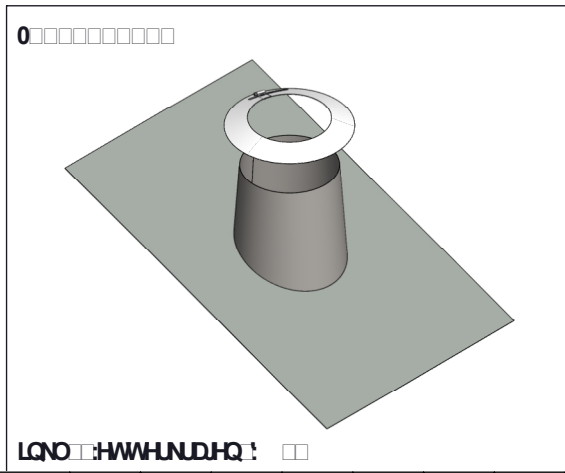


A
B
C
D
E
F

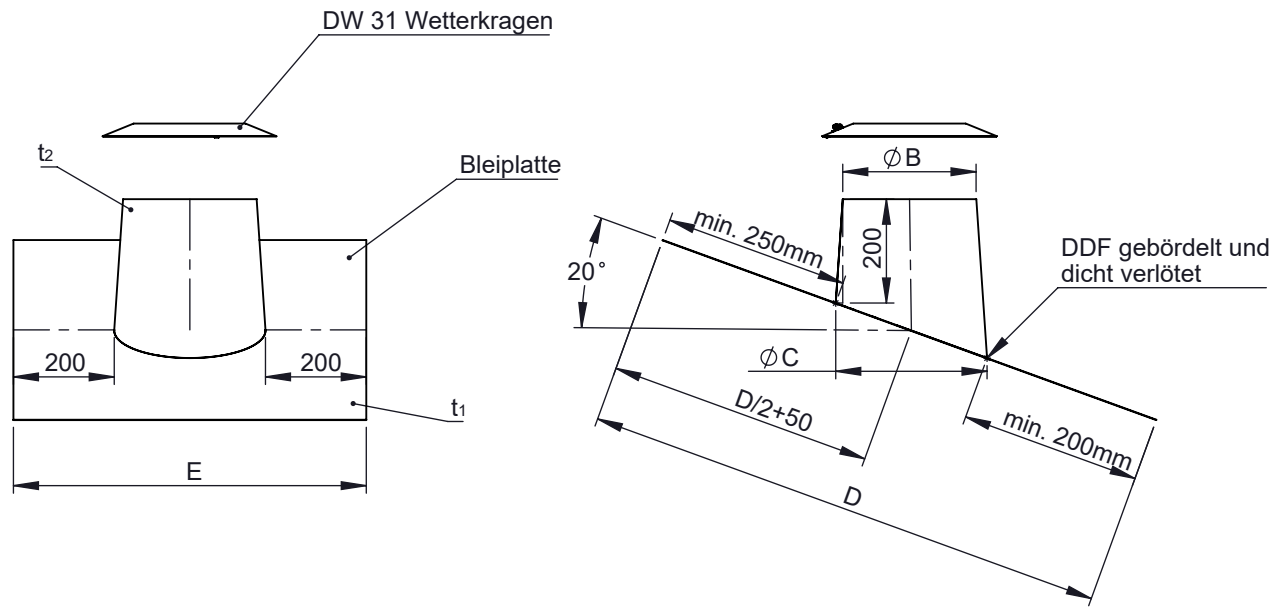

<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
%	195	215	230	235	245	255	265	275	295	315	340	365	415	465	515	565	615	665	715
&	230	250	265	270	280	290	300	310	330	350	375	400	450	500	550	600	650	700	750
'	1000														1040	1090	1150	1200	1250
(630	650	665	670	680	690	700	710	730	750	775	800	850	900	950	1000	1050	1100	1150
W	0,8																		
W	0,5														0,6				
NJ	6,29	6,49	6,64	6,69	6,79	6,88	6,98	7,08	7,24	7,45	7,66	7,88	8,28	8,66	9,35	10,2	11,1	11,9	12,7

Material: 1.4404 / 1.4301 Hochglanz	DIN ISO 13920 Tolerances B					scale	
	Revisionsnummer A5		mm / kg			format	
	notes:				Artikelbezeichnung		sheet
	Datum		Name		Dachdurchführung 16°-25° mit Bleischürze und Regenkragen		1 of 1
	drawn by		JGR				
checked by							
approved by				Artikelnummer			
modified by				DWP-Ø-096			